



## PRODUCT OVERVIEW

Sonetonix WiFi Smart device controlling your lighting & Home appliances. The whole system goes on your wall accompanied by insert Switchboard Modules which sit behind your existing switchboards. The switchboard module enables your appliances to communicate with the Brain of the system, which acts as a connectivity hub, letting you control your appliances through the Smart phone app

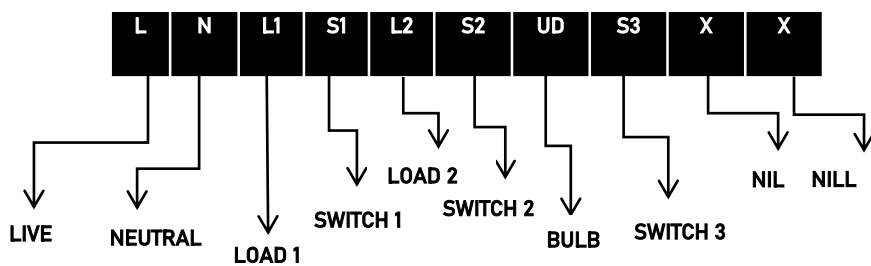

WIRING DIAGRAM

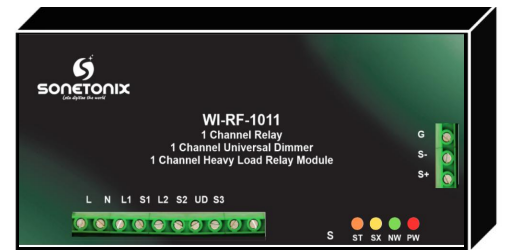

WI-RF-1011

## TECHNICAL SPECIFICATION

Combination	0 Humming free fan 1 Dimmable load 1 Normal load 1 Heavy load
Operating input voltage	100 -240 VAC.
Supported frequency	50-60 Hz
Communication protocol	Wi-Fi/2.4GHz/RS-485
Max.load (HL/NL/UD) @channel	4000w/2500w/2400w
Wi-Fi signal strength min	» 50 %
Operating temperature	0°C - 45°C
Product size	122mmx54mmx25mm
Shockproof	No
Water resistance	No

## FEATURES



Anti-shock switching



Compatible with traditional switches and capacitive switches



Hassle free installation & No rewiring



Smooth Universal Bulb Dimming



OTA update support



Optional RS-485 communication