


PRODUCT OVERVIEW

Sonetonix WiFi Smart device controlling your lighting & Home appliances. The whole system goes on your wall accompanied by insert Switchboard Modules which sit behind your existing switchboards. The switchboard module enables your appliances to communicate with the Brain of the system, which acts as a connectivity hub, letting you control your appliances through the Smart phone app

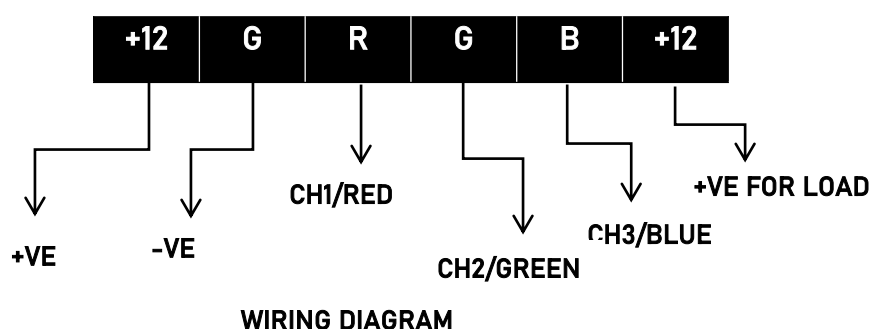

WI-RGB/LD-3

TECHINICAL SPECIFICATION

| | |
|---------------------------|--|
| Combination | 0 Humming free fan 3 Dimmable load 0 Normal load 0 Heavy load |
| Operating input voltage | 12 VDC / 24VDC. |
| Connect Method | Common Anode mode |
| Communication protocol | Wi-Fi/2.4GHz/RS-485 |
| Max.load (per channel) | 5 Meter |
| Wi-Fi signal strength min | » 50 % |
| Operating temperature | 0°C - 45°C |
| Product size | 84mmx 54mm x 25mm |
| Shockproof | No |
| Water resistance | No |

FEATURES



Anti-shock switching



Compatible with traditional switches and capacitive switches



Hassle free installation & No rewiring



OTA update support



Optional RS-485 communication