



WI-TKP-4

TOUCH KEYPAD

The WI-TKP-4 is a premium 4-way smart touch keypad designed for modern automation systems. With sensitive capacitive touch control and elegant design, it offers intelligent control of lighting and appliances with style, reliability and ease.



CAPACITIVE
TOUCH CONTROL



2.4GHz WI-FI &
S-NET COMMUNICATION



LED GUIDANCE
AT NIGHT



EASY
INSTALLATION



SAFE &
DURABLE



ELEGANT &
MINIMAL DESIGN

KEY FEATURES

- ✓ Capacitive touch control based keypad
- ✓ Available in 3 and 4-button models in multi colour glass panels.
- ✓ Timing switch to turn ON/OFF your lights and appliances automatically.
- ✓ Refined appearance and made of fire-resistant material, Safe and Durable.
- ✓ Overload protection, easy to replace your traditional mechanical switch (Requires neutral wire).
- ✓ The Smart switch blends well with any room decor with its elegant, minimal design with sensitive capacitive touch control.
- ✓ LEDs can guide you at night when lights go OFF and you a simply turn it ON&OFF by directly pressing.
- ✓ Installation – fits 2 modular electric boxes

PRODUCT VARIANTS



BLACK GLASS
Oxide Silver
Finishing Panel



BLACK GLASS
Retro Nostalgic
Finishing Panel



GOLD GLASS
Gold Colour
Finishing Panel

ABOUT WI-TKP-4

- The WI-TKP-4 features 4 Smart touch keypad with sensitive capacitive touch control. Its LED's can guide you at night when lights go off and you a simply turn it ON/OFF by directly pressing.
- Third party automation modules or other Sonetonix modules are interfaced through Works on reliable 2.4Ghz Wi-Fi technology & Third party automation modules or other Sonetonix modules are interfaced through high speed S-NET communication.

S-NET

The WI-TKP-4 communicates with a 3rd Party control system via the S-NET control network. S-NET ports is provided on the WI-TKP-4 for easy daisy-chaining of several DIN Rail Series automation control modules.

ELECTRICAL SPECIFICATION

	Operating Voltage	: 12VDC
	Operating Temperature	: 0 - 45 °C
	S-NET Power Usage	: 1.08 Watt (0.09A @12Volts)

CONTROLS & INDICATIONS

	PWR (Blue)	: Blue LED illuminates when DC power is applied to the power port
	COM (White)	: White LED, Blinking @ 1 sec indicates normal working condition of the Device


CONNECTIONS

S-NET	: 4-pin individual terminal connector for S-NET communication
--------------	---

DIMENSIONS & INSTALLATION

Installation on wall surface	: 2 modular electrical gang box or Round cut-out 52mm in diameter
Installation on wooden wall surface	: Round cut-out 52mm in diameter


DIMENSIONS (mm)

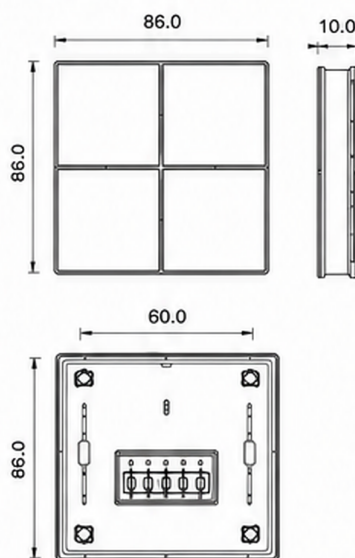

MECHANICAL SPECIFICATION

Mounting	6M wide DIN rail mounting
Material	Light gray polycarbonate housing
Dimension (In inches)	4.18 (W) X 3.71 (H) X 2.35 (D)
Weight	150 Grams

Installation on wall surface
(2 Modular Electric Box)

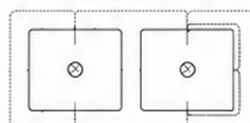

Installation on wooden wall surface
(Round cut-out 52mm)

